

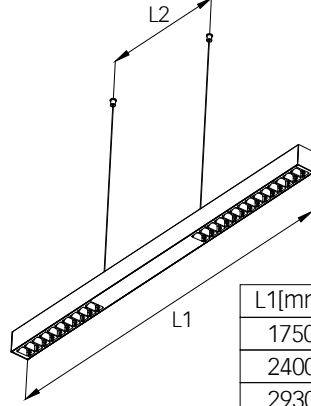


MATRIC RY | SYSTEM 40MM SUSPENDED

1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

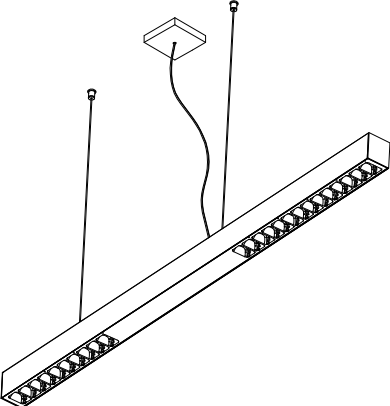


1. Bei allen Montagearbeiten Handschuhe tragen.
 Use gloves when handling the fixture.

L1[mm]	L2[mm]
1750	750
2400	1000
2930	1100

2. Montageöffnungen.
 Installation openings.

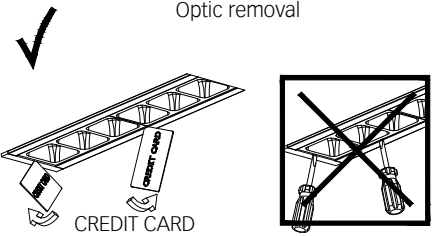


Optic removal


✓

CREDIT CARD


3.

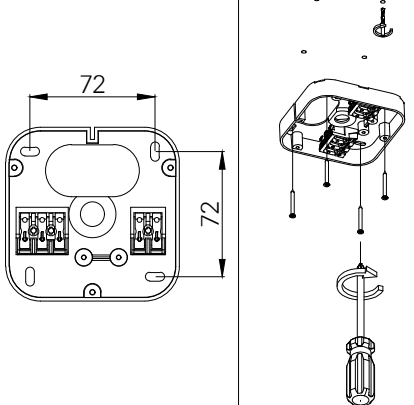

4.

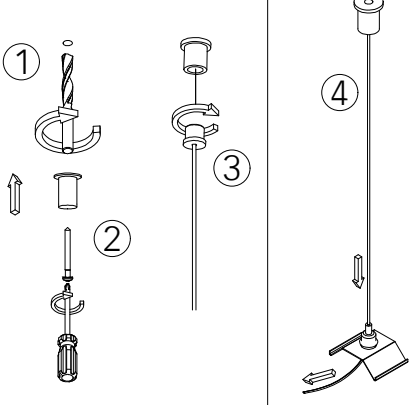

5.

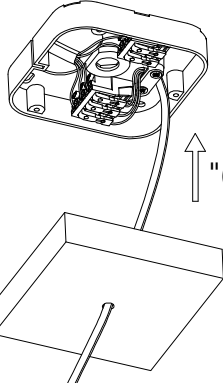


"Click"

6.

- min/max stripped wire length: 7mm-10mm

- max power supply cable: 1,5mm²

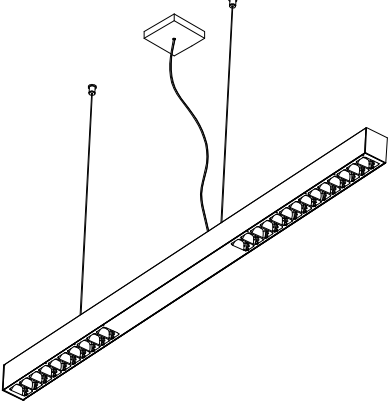

7. Maximum current load allowed to through-wiring is 13A.
 Non-user replaceable light source.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.